

Austin LED Consultants Inc 815-A Brazos #326 Austin Tx, 78701 512 377 6052

http://atxled.com

PL-AT-TW1-W Alexa / Google / WiFi Constant Current Tunable White LED driver with PoE 802.3af / 802.3at AutoSwitching



Product Description - PL-AT-TW1-Wiz - PoE powered WiFi LED driver

This LED driver in a compact module can be installed 328 ft away from a PoE injector or switch using Cat-5e cable. In most areas PoE installations do not require licensed electricians The PL-AT-TW1 is installed between a PoE switch and a LED panel light. The PL-AT-TW1 has low standby power, and is configurable for 300ma, 700 or 1000 ma of LED current requirements. The wide output voltage range of 9 to 50 volts fits the NEC / NFPA codes for low voltage wiring and allows almost any LED fixture to be used. Use a fixed CCT or dual string tunable white LED fixture

Intended for use with any 802.3af, 802.3af or passive Poe injector or switch, the output current automatically adjusts to match the PoE source. If connected to an 802.3af switch, the output current will be 300 ma, with 802.3at switches it will be 660 ma. If you work with passive injectors – we have an 802.3at bypass jumper to force higher power operation.

When used with a 802.3bt switch – two devices can be connected in series to use all 4 pairs of the Ethernet cable and double the wattage on one PoE port. Boost jumper allows 1000 mA output in 802.3at or passive mode.

The attached LED can be turned on/off and Dimmed from a SNMP type PoE switch or injector, or from a momentary switch like the AL-WS-M. WiFi and Bluetooth control by Wiz Pro Connected lighting is supported. Use the App or Alexa or Google control of brightness, schedule and Color temperature.

Specifications for PL-AT-TW1

Power input 44 to 56 volts 802.3af or 802.3at or Passive PoE

RJ45 Input Connector

mode A power used. Mode B passthru

RJ45 LED status Green means PoE active, Amber means 802.3at

The output RJ45 connector also has the connection to a RH-253 or AL-WS-M switch for On/Off/Dim.

On/Off/Dim switch to a RH-253 or AL-WS-M switch for Connect pins 7&8 to your switch

LED Output Voltage 9v to 50v 35 watts max

a) with 802.3af max current 360 ma = 12 watts

Output Power b) with 802.3at max current 660ma = 23 watts

c) jumper selection for 1000 mA $\,$

802.3at passthru. RJ45 input pairs 4&5 and 7&8 are RJ45 Output Connector connected to pairs 3&6 and 1&2 on this output

connector to allow two devices on one CAT-5e cable

Current reduced to 360 mA if 802.3af switch

Auto power switching detected increases to 660 or 1000 ma if 802.3at

Inrush limiter Built in – automatic

Hot Swap LED load can be disconnected under power 802.3af keep alive 25% duty cycle 10mA load keeps the PoE port live Output current 360 ma, 660 / 1000 ma auto or manual selection

TE 3 pin connector with spring load

LED output connector

Common +, Warm White, Cool White

Pinout 802.3af / 802.3at Pins 1,2 and 3,6 provide power either polarity

Automatic power detection feature:

Protection Reverse, short and static protection


Operating Temperature 0°C ~ 50°C



Keep Alive

Keep Alive is the current needed to keep a PoE switch port from shutting down. Simple keep alive burns 500 mW when the LED is off. Smart Keep Alive reduces this to 100 mW. An internal jumper allows this to be set to 10 mW for 802.3bt applications.

RJ45 pinout

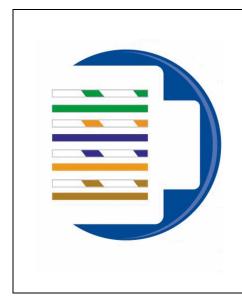

Pin	In	Out
1	PoE 1	PoE 2
2	PoE 1	PoE 2
3	PoE 1	PoE 2
4	PoE 2	Dim / Switch
5	PoE 2	PIR +
6	PoE 1	PoE 2
7	PoE 2	Signal
8	PoE 2	Ground

PoE Power Input for 2 devices

Use a PoE switch or injector to supply power. It can be mode A 802.3af, 802.3at or 4 pair 802.3bt, one device will connect using Mode A for up to 25 watts, allowing a second downstream device to accept power on Mode B. Any 8 wire cat-5e cable can carry 2 separate PoE power sources. A PL-AT-TW1E accepts power from PoE Mode A and passes PoE Mode B to the output connector on Mode A.

PoE Mode A Power Input

PoE mode A is the power for the LED attached to this device. It can be mode A 802.3af, 802.3at.

PoE Mode A Power Output

PoE Mode B is the optional power FROM an 802.3bt switch. It is passed thru the device to the next device in the chain to provide power to a second PL-AT-TW1E attached to the output connector. The output RJ45 moves the mode B input to Mode A output so no crossover is required, this fully utilizes PoE switch ports. The two PoE devices can operate independently, and a modern PoE switch can select mode A or mode B on the PSE independently.

Dimmer / Switch In

The device has a Switch input. If a momentary switch is used (Legrande RH-253 or ATX LED AL-WS-M), then each press will toggle the light on/off. Or, if a standard On/Off switch is used, then when open the LED is ON, when closed the LED is OFF. If a PWM signal is applied (For example from a AL-WS-010v) then the LED can be dimmed using a DALI control system. Connect the switch between pins 7&8 of the output connector to create a On/Off/Dim switching ability. If PoE power is cut and then started again – the Light will return to the previous On/Off state. Hold the switch to cause the light to dim.


If two PL-AT-TW1E are connected onto one CAT-5e cable to the power source, see our application note for how to have one wall switch control 2 PL-AT-TW1E in unison.


Tunable White applications

With a suitable attached LED (like the P023R11-1440-27/50K) you can provide circadian rhythm controlled light. The device will respond to Cloud based or Building Management commands to change the color temperature of the attached LED. For example a range of 2500 to 6500 is possible.


Wiz Connected Light App Setup

Install the Wiz app on your phone. Create a home, create a room, and then click to add a light. Enter pairing mode using the method above. Note – if the device has been paired before – you will have to enter pairing mode twice for this to work. Once in pairing mode – it will take up to 2 minutes to complete. Note – you will need at least one operating SSID (wifi network) on 2.4ghz for this device to work. Also note – in step 4 – wifi network name – click on the "eye" icon to see your SSID Password and insure that it is correct. Advanced users can upgrade to the building management Wiz Pro.

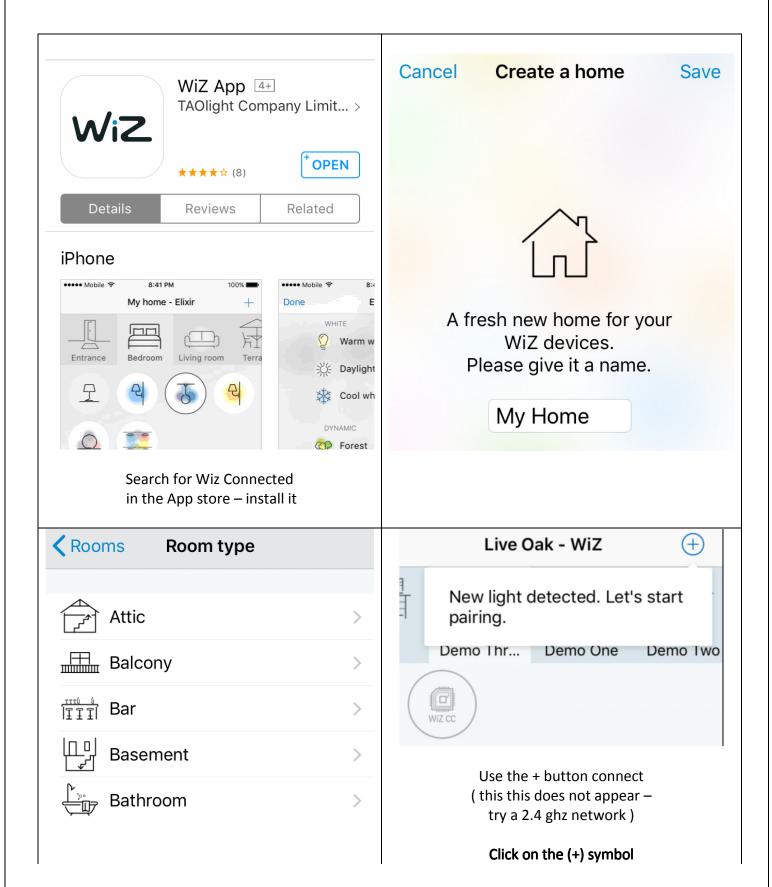


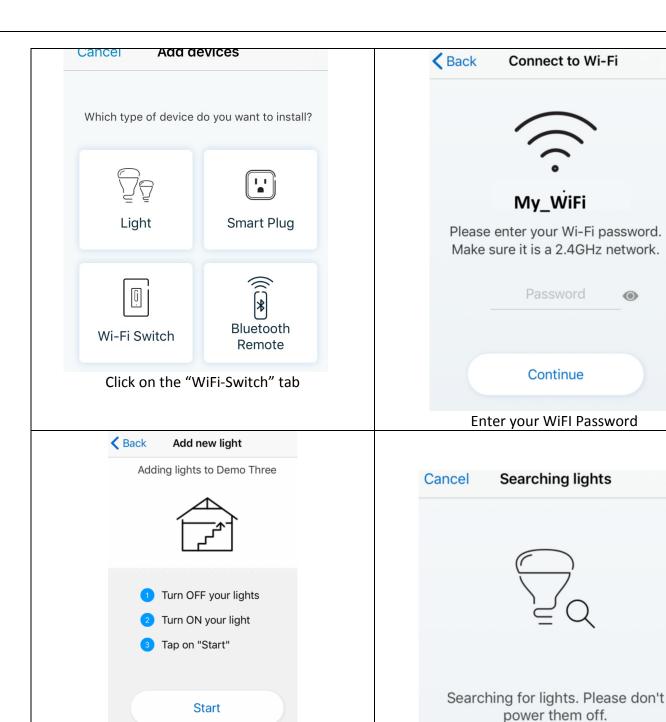



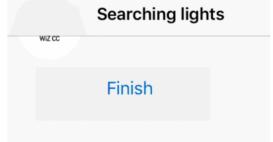

New device found

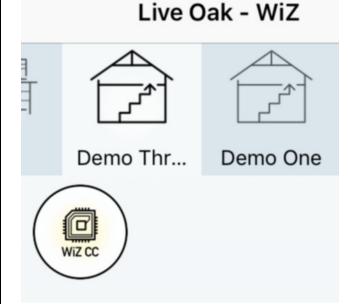

You can now control the light. Next step is in the Amazon Alexa App to add this light to voice control